

# **SAUBAG**

---

## **DIGITAL SIGNAGE DISPLAYS**


# OUTDOOR SOLUTIONS OMEGA

OMEGA is the most durable interactive freestanding multimedia solution for outdoor advertising and displaying public information. It is the best choice for environments exposed to extreme cold, heat, moisture and vandalism.

OMEGA's robust welded stainless steel case with resistant screen protection glass together with closed loop heating/air conditioning system and remote monitoring/control capability provides high-level multimedia hardware protection. It smoothly operates in Scandinavian winter snowstorms and Middle Eastern summer swelter.



## From 32" to 75"

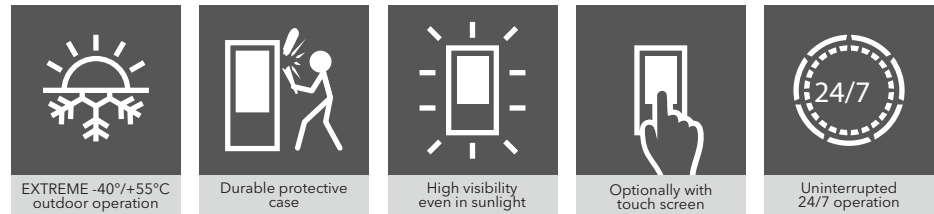

### MAIN FEATURES

**DURABILITY** - robust welded stainless steel case (2mm)

**HARDWARE PROTECTION** - closed loop heating/air conditioning system (HVAC), remote monitoring/control capability

**COMPATIBILITY** - vast selection of multimedia players or PC's

**PROFESSIONAL DISPLAY** - high resolution and brightness (2500 nit), 24/7 operation

**INCREASED SAFETY** - resistant screen protection glass (4+4mm laminated), spider lock system




**EASY ACCESS & SERVICE** - key lockable front door opening, additional socket for service equipment

**CUSTOMISATION OPTIONS** - wide totem customisation and branding options, optional WiFi antenna, camera, card readers, NFC, printers and other peripherals on requests

# OMEGA

TECHNICAL SPECIFICATIONS

	BO49L2500	BO55L2500	BO75L2500	
<b>General</b>	Screen size	49"	55"	75"
	Panel type	LED LCD IPS	LED LCD IPS	LED LCD IPS
	Brightness	2500 cd/m2	2500 cd/m2	2500 cd/m2
	Aspect ratio	9:16	9:16	9:16
	Resolution	1080 x 1920 px	1080 x 1920 px	1080 x 1920 px
	Viewing angle	178° horizontal / 178° vertical	178° horizontal / 178° vertical	178° horizontal / 178° vertical
	Signal input	DVI-D, VGA, HDMI	DVI-D, VGA, HDMI	DVI-D, VGA, HDMI
	Control	RS232, OSD	RS232, OSD	RS232, OSD
	Life cycle	50'000 hours	50'000 hours	50'000 hours
	Operation length	24h/day	24h/day	24h/day
	Screen orientation	portrait	portrait	portrait
	Screen side	single-sided and double-sided	single-sided and double-sided	single-sided and double-sided
	Warranty	36 month limited warranty	36 month limited warranty	36 month limited warranty
	Packaging	wooden box, foam plastic	wooden box, foam plastic	wooden box, foam plastic
	<b>Environment</b>	Environment rating	Indoor, IP65	Indoor, IP65
Operating temperature		-40°C / +55°C	-40°C / +55°C	-40°C / +55°C
Environment humidity		0% - 100%	0% - 100%	0% - 100%
<b>Enclosure</b>	Kiosk enclosure material	high quality welded stainless steel enclosure	high quality welded stainless steel enclosure	high quality welded stainless steel enclosure
	Display protection glass	4+4 mm duplex tempered glass	4+4 mm duplex tempered glass	4+4 mm duplex tempered glass
	Finish	powder coated RAL colours	powder coated RAL colours	powder coated RAL colours
	Maintenance	front side opening	front side opening	front side opening
	Lock system	lockable with spider system lock	lockable with spider system lock	lockable with spider system lock
	Kiosk mounting	freestanding with foot base plate / floor or wall-mounted	freestanding with foot base plate / floor or wall-mounted	freestanding with foot base plate / floor or wall-mounted
	Climate control	internal air conditioner and heating, optimised thermal design	internal air conditioner and heating, optimised thermal design	internal air conditioner and heating, optimised thermal design
<b>Power</b>	Power consumption / double-sided	1030W / 1240W	1180W / 1580W	1800W / 2500W
	Power supply	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz
<b>Optional</b>	Touch sensor	capacitive	capacitive	capacitive
	Other sensors, detectors	kinect, presence detector, barcode scanner	kinect, presence detector, barcode scanner	kinect, presence detector, barcode scanner
	Foot base plate	metal base plate with or without casters	metal base plate with or without casters	metal base plate with or without casters
	Audio	2x 15W	2x 15W	2x 15W
	PC	Intel NUC, A-Open etc.	Intel NUC, A-Open etc.	Intel NUC, A-Open etc.
	Branding	sticker, backlit logo, multicolour glass facade	sticker, backlit logo, multicolour glass facade	sticker, backlit logo, multicolour glass facade
	Special glass	anti-reflective	anti-reflective	anti-reflective
<b>Dimensions</b>	Extended warranty	up to 5 years	up to 5 years	up to 5 years
	Height	207 cm	215 cm	230 cm
	Floor plate to display	90 cm	82 cm	57 cm
	Width	65 cm	84 cm	109 cm
	Depth / double-sided	28 cm / 39 cm	35 cm / 49 cm	35 cm / 49 cm
	Weight / double-sided	278 kg / 417 kg	310 kg / 465 kg	395 kg / 593 kg





**SAUBAG**  
DIGITAL SIGNAGE DISPLAYS

[www.airwave.tv](http://www.airwave.tv) - [info@airwave.tv](mailto:info@airwave.tv)

**AIR WAVE**  
DELIVERING YOUR VISION