

Artistic Space Beyond Display

Dual-view Curved Tiling OLED Signage 65EE5PC



With cutting-edge OLED technology, LG Electronics introduces an innovative Dual-view Curved Tiling OLED Signage that has perfect picture quality and revolutionary pencil-thin design, adding artistic value to its display functionality.



Perfect Black

Limitless contrast and deepest black

Self-lighting pixels switch off completely to reproduce black with no light bleed. Absolute black offers infinite contrast.



LCD


LG OLED Signage



Perfect Color

Accurate & stable color reproduction

Self-lighting pixels bring colors to life with superb accuracy.

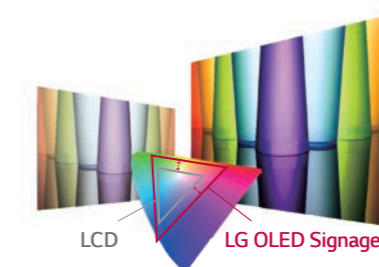

LCD

LG OLED Signage



Perfect Viewing Screen

Wide viewing angle

LG OLED Signage delivers awe-inspiring picture quality across the entire screen, even from wide viewing angles.



LCD

LG OLED Signage



Crisp, Clear Motion

Faster response time

LG OLED Signage provides 5,000 times faster motion picture response time, for perfectly clear images without blurring.



LCD


LG OLED Signage



Perfect Design

Slim and light

With just two layers, the LG OLED Signage Display is unbelievably thin.

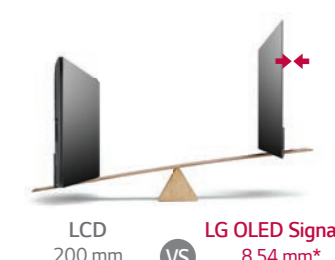

LCD
200 mm

VS
LG OLED Signage
8.54 mm*

* Edge depth

Download LG Commercial Display Mobile App



Apple App Store



Google Play Store

Learn more www.lg.com/b2b

YouTube youtube.com/c/LGCommercialDisplay

LG may make changes to specifications and product descriptions without notice.
Copyright © 2017 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.



Artistic Space Beyond Display

Dual-view Curved Tiling OLED Signage 65EE5PC



Screen Size
65"


- 65EE5PC
- Brightness : 450 cd/m² (APL* 25%)
 - Bezel : 15.0 mm (U) / 26.0 mm (B) / 13.2 mm (L/R)
 - Depth : 8.54 mm (Module)
 - Interface : HDMI / RS232C / RJ45 / IR receiver
 - SuperSign Premium/C



Key Features

Two Displays for Multi-Use

Two-way media experience and space saving thanks to innovative slim depth.

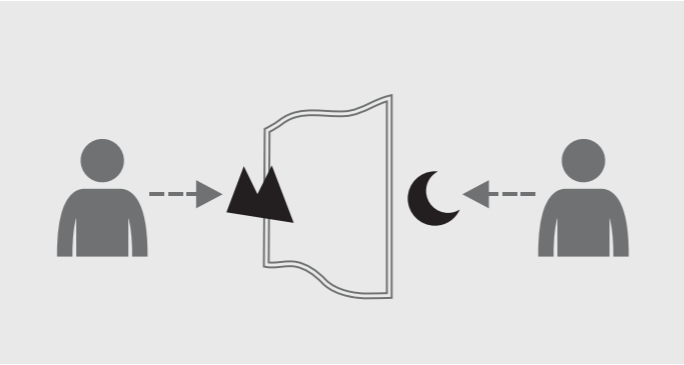

Modular Design

Modular design allows different layouts between 1 x 2 and 1 x 4 with the same design identity.

An example table for placing order by each model

Set	Module	Stand	External Cover		
	65MODLC	65EE5PC	65CVR4C	65CVR3C	65CVR2C
1 x 4	4ea	4ea	1ea	-	-
1 x 3	3ea	3ea	-	1ea	-
1 x 2	2ea	2ea	-	-	1ea



1 x 2



1 x 3




1 x 4

* Accessories include stand cover, top/side/bottom deco., cables, IR receiver, etc.

PC-less Playback

High performance SoC & high internal memory capacity (128 GB) enable perfect UHD-synced playback without the need for media players.

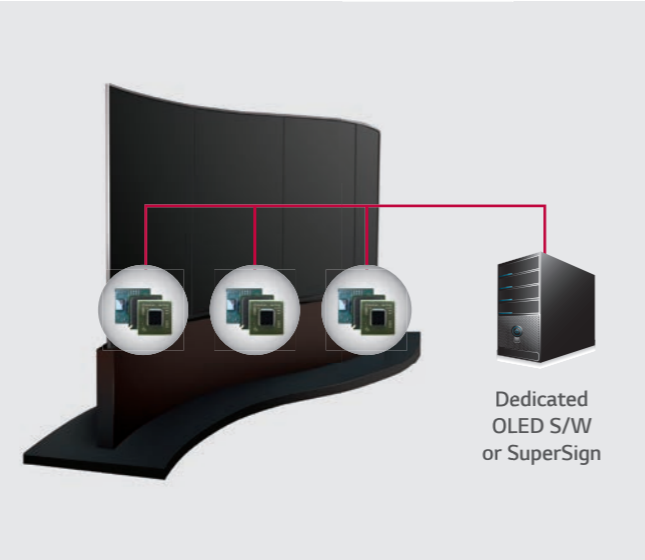

Specifications

		65EE5PC
PANEL	Screen Size	65"
	Panel Technology	OLED
	Aspect Ratio	16 : 9
	Native Resolution	3,840 x 2,160
	Brightness	140/450 cd/m ² (APL* 100% / 25%)
	Color Gamut	129%
	Viewing Angle (H x V)	120 x 120
	Response Time	1 ms (G to G) (Typ.), 8 ms (MPRT)
	Surface Treatment	Hard coating (2H), Anti-reflection
	Life time (Min.)	30,000 hrs
CONNECTIVITY	Operation Hours	12Hrs / 7days (Moving Video Only)
	Orientation	Portrait
	Input	HDMI (HDCP 2.2, External)
	Output	-
	External Control	RS232C IN, RJ45, IR Receiver
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	15.0 mm (U) / 26.0 mm (B) / 13.2 mm (L/R)
	Dimension (W x H x D)**	Display: 3,123 x 2,120 x 8.54 mm (Module), 99 mm (Stand Neck)
	Weight**	380 kg
	Carton Dimensions (W x H x D)**	1,040 x 860 x 1,313 (65EE5PC, including pallet) 2,264 x 1,282 x 1,053 (65CVR4C, including pallet) 1,960 x 1,140 x 1,086 (65MODLC, including pallet)
		Packed Weight** 190 kg (65EE5PC, 4Set Total) 198 kg (65CVR4C) 140 kg (65MODLC, 4Kit Total)
SPECIAL FEATURES		Temperature Sensor, Cooling FAN, Tile Mode, Source Selection (HDMI, DP), DPM Select, Energy Saving, Motion Eyecare, Internal Memory 128 GB (System 4 GB + Available 124 GB) Firmware update (LAN), HDMI-CEC, Fail over (DP, HDMI, Internal Memory) , DP daisy chain
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
POWER CONSUMPTION	Typ.	230 W
	DPM	3 W
	Power Off	0.5 W
STANDARD (CERTIFICATION)	Safety	N/A
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	ErP
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	N/A
	External Media Player Attachable	N/A
SOFTWARE COMPATIBILITY	Content Management Software	SuperSign Premium
	Control and Monitoring Software	SuperSign C
ACCESSORY	Basic	Remote Controller (2ea batteries included), Power Cord, HDMI Cable, DP Cable 7ea, RS232C Cable 8ea, LAN Cable 9ea, QSG
	Optional	N/A

* Average Picture Level

** Based on 1x4 model

For more details, get in touch on 0845 555 1212 or info@airwave.tv